



CK3010/3310

30 - 33 HP



EXPERIENCE THE POWERFUL CK Series

Power Steering wheel

With hydraulic power steering, you will experience smooth responsive steering that reduces the effort required to make tight turns or repetitive tasks.

Illuminated Dashboard

The illuminated dashboard ensures great visibility while working in bright daylight or at night. The digital gauge shows tachometer, fuel and temperature with warning signs for low fuel and high temperature.

Powerful HST Transmission

Heavy-duty HST with two-range transmission (Hi/Low) helps you simply get your job done. A single pedal allows you to change speed and direction without clutching or shifting. With Kioti HST drive system, you will enjoy the convenience of ride.

Single Lever Joystick

Front end loader work is made easier by the use of a single lever joystick. The lever automatically returns to neutral and the loader stops in place when the joystick is released. A float position allows the bucket free floatation over the ground surface.



Powerful Environmentally Friendly Engine

The Powerful Environmentally Friendly Engine will offer a quiet, smooth running and powerful performance.

Compact and Ergonomic design

Compact and stylish streamlined hood design improves visibility and serviceability of the operator. A vertical fully opening hood allows easy access to the air filter, oils, fuse box and electrical components for inspection and maintenance.

HST Cruise Control (Std. only for HST)

HST cruise system enables the tractor to maintain a steady speed and RPM as set by the operator.



Hi/low Speed Ranges(HST Model)

Two-range (Hi/Low) transmission provides the powerful and efficient drive and easy operation in any task.

Increased Hydraulic Pump Capacity

High hydraulic pump capacity (42.9 liters/min) enables faster implement work and improves the work efficiency and productivity.

Foldable ROPS

The standard foldable ROPS allows the ROPS to fold to fit into low clearance areas.


Hydraulic 4WD

Front wheel driving is easily engaged by hydraulic clutch.

Front Loader

The Kioti KL128 front loader is specially designed for CK30/3310 tractor, providing efficient performance with single joystick control. The Kioti loader is designed for quick and easy attachment/detachment.

Loader Specifications

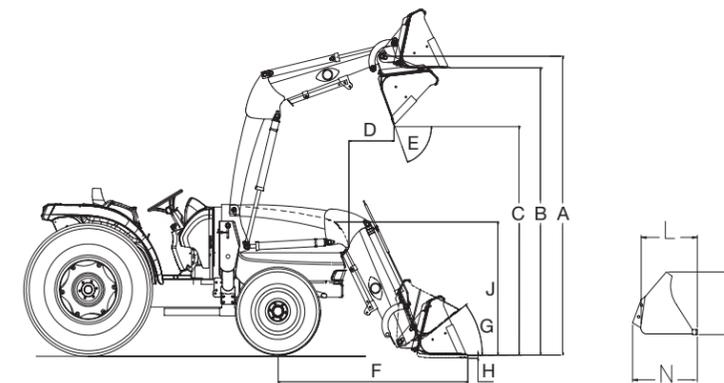

* Specifications shown are based on ASAE Standards.
Specification may vary with tractor model, front axle configurations, tire size options and type of attachment.

MODEL	KL128
A Maximum Lift Height	2,208 mm
B Clearance with Attachment Level	2,034 mm
C Clearance with Attachment Dumped	1,697 mm
D Reach at Maximum Height 45°	562 mm
E Maximum Dump Angle	44 degree
F Reach with Attachment on Ground	1,498 mm
G Attachment Rollback Angle	42 degree
H Digging Depth Below Grade	105 mm
J Overall Height in Carry Position	1,058 mm
L Depth of Attachment	440 mm
M Height of Attachment	448 mm
N Depth of Attachment (to pivot pin)	557 mm
S Lift Capacity to Full Height at Pivot Pins	535 kgf
T Breakout Force at Pivot Pins	570 kgf
Lift Cylinder	ø 30 mm × 350 mm
Bucket Cylinder	ø 30 mm × 321 mm
Bucket Width	1,270 mm
Bucket Weight	70 kg
Approx. Weight (without Bucket)	225 kg
Bucket Capacity	0.22 m ³ (0.16 m ³)

* Specifications and design are subject to change without notice.



ISO 9001
NO.954596



ISO 14001
NO.771475



OHSAS 18001
NO.K033008

SPECIFICATIONS

MODEL	CK3010		CK3310	
	MANUAL		HST	
ENGINE				
Model	3A139LWB-EU		3A165LWM-E	
Type	3Cyl., In-line Vertical, Water-Cooled 4-Cycle Diesel Engine		3Cyl., In-line Vertical, Water-Cooled 4-Cycle Diesel Engine	
Engine Max	HP	30	33	
Displacement	cc	1,393	1,393	
Rated Revolution	rpm	2,600	2,600	
Fuel Tank Capacity	ℓ	25	25	
DRIVE TRAIN				
Clutch	Dry Single		Dry Single	
Transmission	Manual		Hydrostatic	
Speeds	3 × 2 (6F2R)		INF. 2	
Differential Lock (Rear)	Standard		Standard	
Brake	Wet Disc Type		Wet Disc Type	
PTO	Type	Transmission		Live
	Rear	rpm	540	540
	Mid (Optional)	rpm	2,000	2,000
HYDRAULIC SYSTEM				
Pump	Gear(Tandem)		Gear(Tandem)	
Total Pump Capacity at Maximum Flow	ℓ/min	42.9	42.9	
3-Point Hitch	Category I		Category I	
Maximum Lifting Capacity (24 Behind Lift Point)	kg	739(546)	739(546)	
Hydraulic Lift Control System	Position Control		Position Control	
Steering	Hydrostatic Power Steering		Hydrostatic Power Steering	
No. of Standard Remote Valve (Rear)	1(Opt)		1(Std)	
TIRE SIZE				
AG. Tire	Front	7-12		7-12
	Rear	11.2-16		11.2-16
Industrial Tire	Front	23×8.5-12		23×8.5-12
	Rear	12-16.5		12-16.5
TRAVELING SPEEDS				
Forward	1.22-17.71		0-17.51	
Reverse	1.51-6.87		0-12.26	
DIMENSIONS				
Overall Length (Including 3-pt Hitch)	mm	2,790	2,790	
Overall Width (Minimum Tread)	mm	1,250	1,250	
Overall Height (from Top of ROPS)	mm	2,335	2,335	
Wheelbase	mm	1,520	1,520	
Min. Ground Clearance	mm	340	340	
Tread	Front	mm	989	989
	Rear	mm	950	950
Weight with ROPS	kg	1,025	1,025	

* NOTE : Specifications and design are subject to change without notice.

STANDARD EQUIPMENT

- Cruise Control (HST model)
- Hydraulic Power Steering
- Joystick Lever with Mid Mount Valve for Front Loader

OPTIONAL EQUIPMENT

- AG Tire Set
- Turf Tire Set
- Front Weight
- Working Lamp
- 7-Pin Connector
- Rear Remote Hydraulic Valve (Manual Model Only)



**KiotiTractor/
DaedongIndustrial Co., Ltd.**
2493, Nambusunhwan-ro, Seocho-gu, Seoul, Korea
Tel 82-2-3470-7454~9 Fax 82-2-3470-7485
www.daedong.co.kr

Dealer Imprint Area

LIT-CK10-ALL1